




100 Victory Drive, Milford, PA 18337 (570) 296-4559 FAX: (570) 296-9298

## T3A-500 Dip Switch Settings

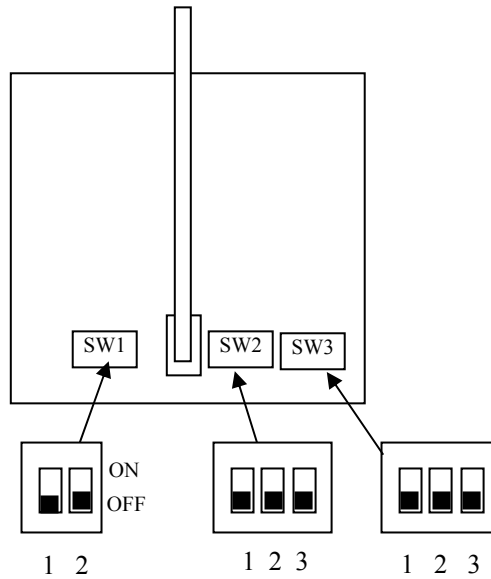


Switch 1 Settings for Field #		
	1	2
Field 1	OFF	OFF
Field 2	ON	OFF
Field 3	OFF	ON
Field 4	ON	ON

Switch 2 Settings for 2 <sup>nd</sup> Trap #			
	1	2	3
Trap 1	OFF	OFF	OFF
Trap 2	ON	OFF	OFF
Trap 3	OFF	ON	OFF
Trap 4	ON	ON	OFF
Trap 5	OFF	OFF	ON
Trap 6	ON	OFF	ON
Trap 7	OFF	ON	ON
Trap 8	ON	ON	ON

Switch 3 Settings for 1 <sup>st</sup> Trap #			
	1	2	3
Trap 1	OFF	OFF	OFF
Trap 2	ON	OFF	OFF
Trap 3	OFF	ON	OFF
Trap 4	ON	ON	OFF
Trap 5	OFF	OFF	ON
Trap 6	ON	OFF	ON
Trap 7	OFF	ON	ON
Trap 8	ON	ON	ON

## R3-500 Dip Switch Settings

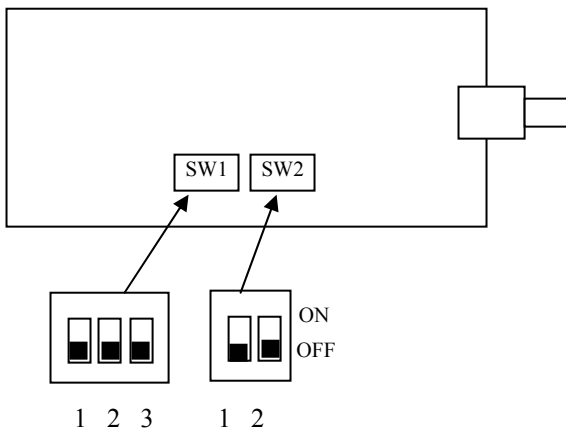

Switch 1 Settings for Trap #			
	1	2	3
Trap 1	OFF	OFF	OFF
Trap 2	ON	OFF	OFF
Trap 3	OFF	ON	OFF
Trap 4	ON	ON	OFF
Trap 5	OFF	OFF	ON
Trap 6	ON	OFF	ON
Trap 7	OFF	ON	ON
Trap 8	ON	ON	ON

Switch 2 Settings for Field #		
	1	2
Field 1	OFF	OFF
Field 2	ON	OFF
Field 3	OFF	ON
Field 4	ON	ON